




# GENUINE DANFORTH® STANDARD® MARINE ANCHORS

## TRADITIONAL, SUPERIOR HOLDING POWER

THIS ANCHOR HAS THE TRADITIONAL  
HOLDING POWER WHICH HAS  
ALWAYS BEEN ASSOCIATED WITH  
DANFORTH STANDARD ANCHORS.

THE SHANK IS MADE OF HIGH  
STRENGTH STEEL. THE STEEL FLUKES  
ARE STRONG AND WIDE. EACH  
ANCHOR HAS A HOT DIPPED  
GALVANIZED COATING FOR LONG  
LASTING PROTECTION.

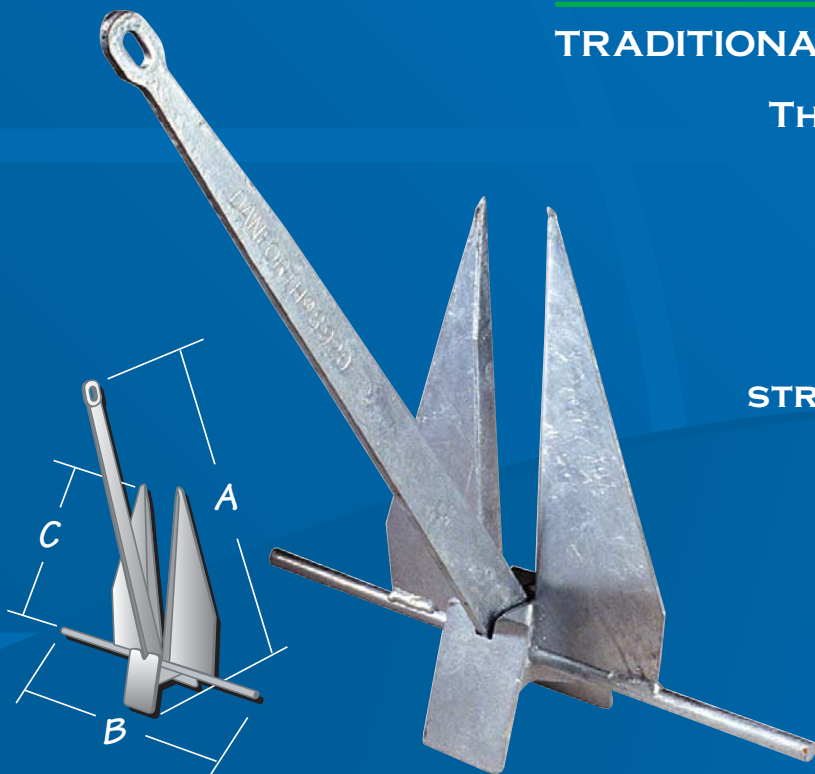

Part Number	Model	Holding Power (lbs)	Weight (lbs)	Boats Up To: (20K Winds*)	Chain Dia.	A Anchor Height	B Stock Length	C Fluke Length
94010	S®160	160	3.5	10 Ft.	3'- 3/16"	17-1/4"	13"	9"
94011	S®300	300	5	17 Ft.	3'- 3/16"	19-1/2"	14-3/4"	10-1/2"
94012	S®600	600	9	27 Ft.	3'- 3/16"	24"	18-1/4"	12"
94013	S®920	920	14	31 Ft.	4'- 1/4"	28-1/4"	21-1/2"	14-1/4"
94014	S®1300	1300	16	36 Ft.	4'- 3/16"	31-3/4"	24"	16-1/2"
94015	S®1600	1600	25	40 Ft.	5'- 5/16"	35"	26-3/4"	19"
94016	S®2000	2000	43	45 Ft.	6'- 3/8"	40-1/4"	31"	22"
94017	S®3000	3000	70	55 Ft.	8'- 1/2"	50"	38"	26-1/2"
94018	S®3500	3500	100	60 Ft.	8'- 5/8"	54"	41"	28-3/4"

\* Tested under equivalent conditions and average bottom conditions

**TIE DOWN ENGINEERING • 5901 Wheaton Drive • Atlanta GA, 30336**  
**www.tiedown.com • (404) 344-0000 • FAX (404) 349-0401**



© Registered Trademark of TIE DOWN ENGINEERING, Inc. Atlanta, Georgia 30336 [www.danforthanchors.com](http://www.danforthanchors.com)

050902,310